




**REMOTE AREA
LIGHTING SYSTEMS (RALS)**

CATALOGUE

JANUARY 2020



SINCE 1976





TABLE + OF CONTENTS

9455Z0 SAFETY APPROVED RALS	3
9600 LED MODULAR LIGHT	4-5
PELI RALS RANGE	6-9
SPECIFICATIONS & ACCESSORIES	10-11



9455Z0 - WORLD'S SAFEST REMOTE AREA LIGHT

+ THE DANGER ZONE NEVER LOOKED SO BRIGHT

Now you can take remote area lighting to hazardous areas around the globe. The Peli™ 9455Z0 RALS is our first area light that's ATEX Zone 0 (Cat. 1) approved allowing you to work where flammable gases, vapors or liquids are present.



Weighing in at 7,3 kg and completely collapsible, the Peli™ 9455Z0 RALS is easy to carry and set up for the next task.


+ UNCOMPROMISING OUTPUT

Most safety certified lights use lower lumens to minimise heat generated by the lamp module. The result is a dimmer light and unsafe work areas. The Peli™ 9455Z0 RALS delivers on all cylinders without compromise. Our engineers developed the Peli™ 9455Z0 RALS to output up to 1600 lumens of clean, bright light that meets hazardous area requirements at the same time.




+ CHARGED FOR YOUR ENTIRE WORK SHIFT

Powered by a NiMH battery, the Peli™ 9455Z0 RALS extracts 10 hours on a single charge, while also maintaining peak brightness on the job. You'll never be caught in the dark- the flashing low battery warning gives you 30 minutes of reserve light.




+ SEE EVERY NOOK AND CRANNY

The Peli™ 9455Z0 RALS projects a 125° beam spread that can help prevent workplace injuries. Conventional torches produce a narrow beam lighting up only small concentrated areas. The 125° beam spread from the Peli™ 9455Z0 RALS lights up the entire work area so you see the work at hand and the peripheral hazards around you, leading to better situational awareness.

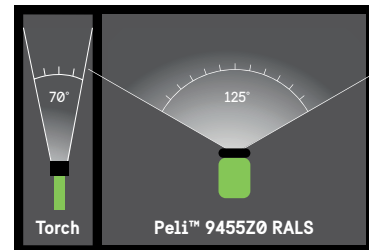

+ HAZARDOUS AREAS: WE TAKE CARE OF YOUR SAFETY

Ignition from lighting products can occur from either the heat of the lamp module or the activation switch, which can emit a spark when activated. The solution is to contain or reduce heat, and also isolate the switch in an airtight enclosure, preventing ingress of gases present in the environment.

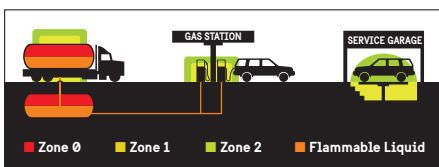

HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS I	Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	- Oil Refinery - - Paint Warehouse - - Offshore Oil Rig - - Spray Booth -	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
CLASS II	Combustible Dusts (Metals [Div.1 only], Coal, Grain)	- Coal Mine - - Grain Silo - - Munitions Factory - - Hay Storage Facility -	Division 1 (Hazard Likely)	Category 1 / Zone 20 (Hazard Certain)	↑
			Division 2 (Hazard Not Likely)	Category 2 / Zone 21 (Hazard Likely)	
CLASS III	Ignitable Fibers & Flyings (Machined Magnesium)	- Paper Mill - - Woodworking Facility - - Textile Mill - - Cotton Gin -	Division 1 (Hazard Likely)	N/A	↓
			Division 2 (Hazard Not Likely)	N/A	
					LEAST

* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.


PELI RALS 9455 SAFETY APPROVED RALS

9600 LED MODULAR LIGHT

+ HSE COMPLIANT LINEAR LIGHTING

Now it's easy to light up long stretches of rail track, tunnels and even a makeshift runway without the hassles of conventional heavyweight light towers. The Peli™ 9600 LED Modular Light utilises specialist optics to offer continuous lighting in order to fully comply with the HSE (Health, Safety, Environment) requirement for illumination.

Also, with less 9600 lights chained up, you will be able to cover the same work area as other linear lights, having a cost-effective result.

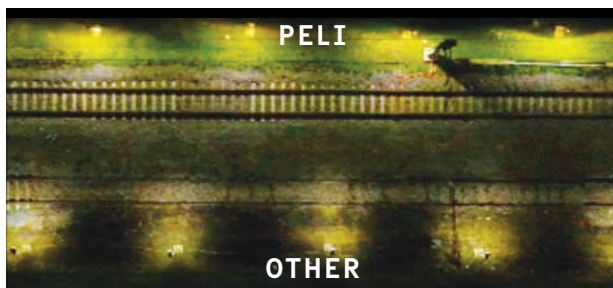

Peli™ 9600 LED Modular Light illuminates a clean, seamless beam spread without dark spots. Competitive lights produce a dull, uneven beam spread.



+ MULTIPLE WAYS TO LIGHT UP A WORK SITE

Engineered with side/end bracket mount receptors and four strap attachment points, plus a stand system that can extend up to 3 m, the Peli 9600 LED Modular Light is ready to mount to fences, hang overhead or stand on its own.



+ PACK TIGHT AND GAIN EFFICIENCY

The Interlocking Stack Pattern makes transportation and storage simple, resulting in a cost-effective use of space.

LEDs tilt 15° each way to adjust light wherever you need it



EU and UK plug available

LINEAR LIGHTING WITHOUT DARK SPOTS



9600

LIGHT SOURCE//

LED

DIMENSIONS HEAD//

46.5 x 21 x 12 cm
(18.31" x 8.27" x 4.72")

LIGHT HEAD HEIGHT (MAX.)//

289.6 cm (114")

CORD LENGTH//

1402.1 cm (552")

BEAM SPREAD//

120°

INPUT VOLTAGE//

90 – 260V

POWER//

23 Watts

LUMENS//

3000

NUMBER OF LEDS//

14

WEIGHT//

4.1 kg (9.04 lbs)

COLOUR//



PELI RALS 9600 LED MODULAR LIGHT

+ ROBUST LIGHTING FOR HEAVY DUTY APPLICATIONS

The 9600 offers minimal light transmission loss in comparison to similar linear lights; the declared 3000 lumen value per light head is the true verified light output.

The durable design with internal shock supports has been tested onto concrete to withstand drops from 3 m and wind speeds of up to 40 km/h in extended mode (2,85 m mast) and up to 35 km/h when folded (1,85 m). Proof that this light has been designed for use in extreme outdoor conditions.

+ KEY BENEFITS

- HSE Compliant. Wider work area: dark spots eliminated (reduce slips/falls)
- Low power (fewer generators)
- Reduced fuel consumption
- Reduced breakages / longer service / less downtime
- Compact & easy to transport / deploy
- No glass breakables
- Maintenance free

PORTABLE LED WORKLIGHT SOLUTIONS

The Remote Area Lighting Systems from Peli brings several dynamic products to the market, offering up to 28 hours of bright LED light.*

The all-encompassing product line spans from the compact single head 9430 (that fits easily into confined spaces) to the four head 9470 (which is capable of turning night into day). Units employ a silent, rechargeable sealed battery, freeing users to work virtually anywhere, on or off the grid, without a generator. Each RALS is designed with LED technology to provide a better quality of light, high reliability and low energy consumption. The result is an energy efficient lighting solution with low long-term operating and maintenance costs.

PELI RALS RANGE



* Stated run times based on low power setting and consecutive head activation. High power and simultaneous head use will lower total run time.

9430

- LIGHT SOURCE//**
High Flux LEDs
- DIMENSIONS//**
40 x 20 x 23 cm
(15.75" x 7.87" x 9.06")
- LIGHT HEAD HEIGHT (MAX.)//**
82 cm (32.28")
- BEAM SPREAD//**
125°
- Large Area Coverage
 - Low Battery Warning System



LUMENS
3000
RUN TIME
15h
UP TO

9430SL

- LIGHT SOURCE//**
High Flux LEDs
- DIMENSIONS//**
40 x 20 x 23 cm
(15.75" x 7.87" x 9.06")
- LIGHT HEAD HEIGHT (MAX.)//**
82 cm (32.28")
- BEAM SPREAD//**
Focused 10° Spot Beam
- 182 m Reach



LUMENS
2000
RUN TIME
15h
UP TO

9455Z0



- LIGHT SOURCE//**
High Flux LEDs
- CLOSED DIMENSIONS//**
39 x 20 x 23 cm
(15.35" x 7.87" x 9.06")
- LIGHT HEAD HEIGHT (MAX.)//**
80 cm (31.50")
- BEAM SPREAD//**
125°
- CERTIFICATIONS//**
II 1G Ex ia op is IIC T4 Ga
- Full Time Battery Level Indication with low battery warning
 - High/Low/Flashing modes



SAFETY CERTIFIED
LUMENS
1600
RUN TIME
10h
UP TO

9480

- LIGHT SOURCE//**
High Flux LEDs
- DIMENSIONS//**
39.4 x 16.5 x 26 cm
(15.5" x 6.5" x 10.25")
- LIGHT HEAD HEIGHT (MAX.) //**
60.3 cm (23.75")
- BEAM SPREAD//**
125°
- 3 pre-set light output levels
 - Full time battery level indication with low level flashing indicator
 - Quick release / Hot swappable battery design with 12 volt power supply



LUMENS
4000
RUN TIME
28h
UP TO



PELI RALS RANGE

9440

- LIGHT SOURCE//**
High Flux LEDs
- DIMENSIONS//**
95 x 20 cm
(37.4" x 7.87")
- LIGHT HEAD HEIGHT (MAX.)//**
215.8 cm (85.0")
- BEAM SPREAD//**
125°
- Deployable 2,13 m Mast
 - Battery level indicator



LUMENS
5300
RUN TIME
8h
UP TO



*For more information on the ATEX Zone 0 & 1 lights, see page 3



9490

LIGHT SOURCE//
High Flux LEDs


DIMENSIONS//
50.8 x 16.5 x 28.6 cm
(20.0" x 6.5" x 11.25")

LIGHT HEAD HEIGHT (MAX.)//
182.8 cm (72.0")

BEAM SPREAD//
125°

- Deployable 1,83 m Mast
- Intelligent Control (allows various light output levels)
- Full time battery level indication with low level flashing indicator
- Quick release / Hot swappable battery design with 12 volt power supply

LUMENS
6000
RUN TIME
24h

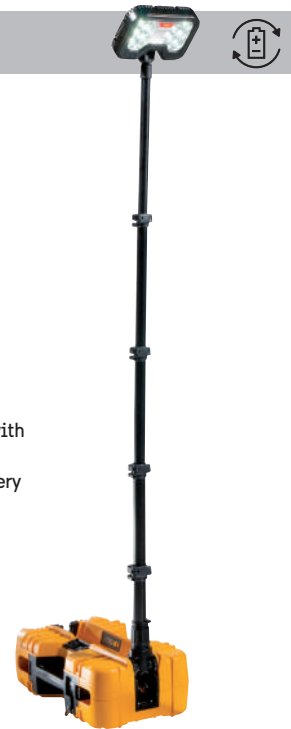

9460M

LIGHT SOURCE//
High Flux LEDs

DIMENSIONS//
59.1 x 35.6 x 23.5 cm
(23.25" x 14.00" x 9.25")

LIGHT HEAD HEIGHT (MAX.)//
201.9 cm (79.50")

BEAM SPREAD//
120°

- Multi-Terrain Trolley
- 12volt Power Supply with Dual USB Adapter
- Housed in a Peli™ Protector Case™

LUMENS
12000
RUN TIME
24h



FEATURES

12V POWER SUPPLY WITH DUAL USB ADAPTER (ONLY ON 9460/M, 9470/M)



12 volt power supply port can be used to power any electrical product that utilizes a standard 12v vehicle style connector (up to 4 amps) or a variety of USB connections.



BLUETOOTH™ CONTROL (ONLY ON 9440, 9460/M, 9470/M, 9480, 9490)

Bluetooth app controls multiple units and variable light from 0-100% output. Free App for iOS™ and Android™.

MULTI-TERRAIN TROLLEY (ONLY ON 9460M, 9470M)



Large 1.5 inch polyurethane wheels allow for easier transport across rough surfaces. Molded feet level and stabilize case.

9460

LIGHT SOURCE//
High Flux LEDs

DIMENSIONS//
59.1 x 35.6 x 23.5 cm
(23.25" x 14.00" x 9.25")

LIGHT HEAD HEIGHT (MAX.)//
201.9 cm (79.50")

BEAM SPREAD//
120°

- 12volt Power Supply with Dual USB Adapter
- Full time battery level indication with low level flashing indicator
- Housed in a Peli™ Protector Case™

LUMENS
12000
RUN TIME
24h
UP TO



9470

LIGHT SOURCE//
High Flux LEDs

DIMENSIONS//
62.9 x 50.8 x 29.8 cm
(24.75" x 20.00" x 11.75")

LIGHT HEAD HEIGHT (MAX.)//
208.3 cm (82.00")

BEAM SPREAD//
120°

- 12volt Power Supply with Dual USB Adapter
- Full time battery level indication with low level flashing indicator
- Housed in a Peli™ Protector Case™

LUMENS
24000
RUN TIME
24h
UP TO



9470M

LIGHT SOURCE//
High Flux LEDs

DIMENSIONS//
62.9 x 50.8 x 29.8 cm
(24.75" x 20.00" x 11.75")

LIGHT HEAD HEIGHT (MAX.)//
208.3 cm (82.00")

BEAM SPREAD//
120°

- Multi-Terrain Trolley
- 12volt Power Supply with Dual USB Adapter
- Housed in a Peli™ Protector Case™

LUMENS
24000
RUN TIME
24h
UP TO



SWAPPABLE POWER PACK (ONLY ON 9480, 9490)



Swappable power pack w/12v aux. port adapter powers smartphones, laptops, etc.






BATTERY LEVEL INDICATOR

Full time battery level indication.



PELI RALS RANGE

RAIS SPECIFICATIONS

MODEL	9430	9430SL	9440	9455Z0 
LIGHT SOURCE	High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs
LAMP HEADS	1	1	1	1
NO. OF LEDS	6	24	12	10
BEAM SPREAD	125°	10°	125°	125°
BATTERIES	12v Rechargeable, Sealed	12v Rechargeable, Sealed	Rechargeable Lithium ion	NiMH
CALCULATED LUMEN VALUE	3000*, 1500***	2000*, 1000***	5300*, 2800**, 1400***	1600*, 800***
BATTERY RUN TIME	8h*, 15h***	8h*, 15h***	1h 50m*, 4h**, 8h***	5h*, 10h***
DIMENSIONS (CLOSED)	40 x 20 x 23 cm (15.75" x 7.87" x 9.06")	40 x 20 x 23 cm (15.75" x 7.87" x 9.06")	95 x 20 cm (37.4" x 7.87")	39 x 20 x 23 cm (15.35" x 7.87" x 9.06")
HEAD	16.5 x 20 x 6.5 cm (6.5" x 7.87" x 2.56")	16.5 x 20 x 6.5 cm (6.5" x 7.87" x 2.56")	20 x 20 x 8.9 cm (7.87" x 7.87" x 3.5")	21 x 14.5 x 5 cm (8.26" x 5.71" x 1.97")
LIGHT HEAD HEIGHT (MAX.)	82 cm (32.28")	82 cm (32.28")	215.9 cm (85.0")	80 cm (31.50")
WEIGHT	10.27 kg (22.65 lbs.)	10 kg (22.05 lbs.)	7.3 kg (16.09 lbs.)	7.3 kg (16.09 lbs.)
COLOURS				
APPROVALS	CE, RoHS Compliant	CE, RoHS Compliant	CE, RoHS Compliant	II 1G Ex ia op is IIC T4 Ga
IP RATING	54	54	65	54

PELI RALS SPECIFICATIONS & ACCESSORIES

RAIS ACCESSORIES

9430	9430SL	9440	9455Z0
9430TP - Tripod	9430TP - Tripod	9446 - 12/24v DC Vehicle Charger	1460AALG - 1460 Case with Custom Fit Foam
9432 - Backpack	9432 - Backpack	9447 - 12/24v Vehicle Charger	
9433B - Socket Adaptor	9436 - 12/24V Vehicle Charger	9483 - Power Supply Assembly	
9436B - 12/24V Vehicle Charger	9437 - Gen I Extension Cord (Blue Connector) 118 inches (3m)		
9437B - Extension Cord (Black Connector) 118 inches (3m)			
9438B - Universal Charger			
9483 - Power Supply Assembly			

9460/M	9470/M	9480	9490	9600
High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs	High Flux LEDs
2	4	1	1	1
20	40	8	10	14
120°	120°	125°	125°	120°
12v Rechargeable, Sealed	12v Rechargeable, Sealed	12v Rechargeable, Sealed Lead Acid SLA	12v Rechargeable, Sealed Lead Acid SLA	n/a
12000*	24000*	4000*, 3000**, 1000***	6000*	3000
3h*, 24h***	2.75h*, 24h***	6h*, 8h**, 28h***	3.5h*, 12h**, 24h***	
59.1 x 35.6 x 23.5 cm (23.25" x 14.00" x 9.25")	62.9 x 50.8 x 29.8 cm (24.75" x 20.00" x 11.75")	39.4 x 16.5 x 26 cm (15.5" x 6.5" x 10.25")	50.8 x 16.5 x 28.6 cm (20.0" x 6.5" x 11.25")	Cord Length: 1402.1 cm (552")
21 x 14.6 x 5.7 cm (8.25" x 5.75" x 2.25")	21 x 14.6 x 5.7 cm (8.25" x 5.75" x 2.25")	21 x 14.6 x 5.7 cm (8.25" x 5.75" x 2.25")	21 x 14.6 x 5.7 cm (8.25" x 5.75" x 2.25")	46.5 x 21 x 12 cm (18.31" x 8.27" x 4.72")
201.9 cm (79.50")	208.3 cm (82.00")	60.3 cm (23.75")	182.8 cm (72.0")	289.6 cm (114")
27.7 kg (61.00 lbs.)	49 kg (105 lbs.)	12.5 kg (27.5 lbs.)	14.51 kg (32.0 lbs.)	4.1 kg (9.04 lbs)
■ ■	■ ■	■ ■	■ ■	■
CE, RoHS Compliant	CE, RoHS Compliant	CE, RoHS Compliant	CE, RoHS Compliant	
54	54	54	54	44

*High | **Medium | ***Low | ^ Figures calculated from LED manufacturer data | Additional approvals may apply. For details go to www.peli.com

9460/M	9470/M	9480	9490	9600
9466 - 12/24v Vehicle Adaptor 9466B - 12/24V Vehicle Charger 9467 - Gen II Extension Cord (Green Connector) 118 inches (3m)	9466 - 12/24v Vehicle Adaptor 9467 - Gen II Extension Cord (Green Connector) 118 inches (3m)	9447 - 12/24v Vehicle Charger 9483 - Power Supply Assembly 9487 - Padded Shoulder Strap 9489 - Powerpack	9447 - 12/24v Vehicle Charger 9483 - Power Supply Assembly 9487 - Padded Shoulder Strap 9489 - Powerpack	9607 - Steel Light Base 9606 - Power Cable 9605 - Aluminium Pole

LEARN MORE ABOUT + OUR PRODUCTS



www.peli.com



AVAILABLE IN 18 LANGUAGES!

www.pelicatalogue.com



www.peli.com/webinars



EMEA

EUROPE, MIDDLE EAST & AFRICA HEADQUARTERS

PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 7
08025 • Barcelona, Spain
Tel +34 934 674 999
Fax +34 934 877 393
www.peli.com

FRANCE

PELI PRODUCTS FRANCE
S.A.S.
20/22 Rue des Petits Hôtels
75010 Paris, France
Tel +33 (0)1 44 83 95 63
Fax +33 (0)1 44 83 95 68
www.peli.com

UK

PELI HARDIGG UK
Unit 4, Brookfield Industrial Estate
Leacon Road
Ashford Kent TN23 4TU
Tel +44 (0) 1233 895 895
Fax +44 (0) 1233 895 899
www.peli.com

U.S.A.

U.S.A. & GLOBAL HEADQUARTERS

23215 Early Avenue
Torrance, CA 90505 USA
Tel 310.326.4700
800.473.5422 (Outside CA)
Fax 310.326.3311
www.pelican.com

GERMANY

PELI PRODUCTS GERMANY GmbH
Düsseldorf Kö-Bogen
Business Center
Königsallee 2b, 5th Floor
40212 Düsseldorf, Germany
Tel +49 (0) 211 882 42 401
Fax +49 (0) 211 882 42 200
www.peli.com

UAE

PELICAN PRODUCTS FZE
JAFZA One Building A office 1511/1512
Jebel Ali Free Zone gate 5
P.O.Box 261008
Dubai – United Arab Emirates
Tel +971 4 8876550
Fax +971 4 8876549
www.pelican.com
www.peli.com

TURKEY

PELI PRODUCTS ANKARA
BRANCH OFFICE
Beştepe Mahallesi,
Nergis Sokak No:7/2
Via Flat İş Merkezi,
Plaza Cubes No:87
Tel +90 312 248 13 86
www.peli.com

PELICAN HARDIGG

147 North Main Street
South Deerfield, MA 01373
Tel (800) 542 73 44
Fax (413) 665 8330
www.pelican.com

* We also have offices in Canada, Japan, China, Australia, South Korea and India

PELI 1 YEAR LIMITED GUARANTEE

Peli Products, S.L.U. ("Peli") guarantees its Remote Area Lighting Systems (RALS) against defects in materials and workmanship under normal use, service, and maintenance for a period of one year from the date of purchase. This warranty applies only to the original purchaser and is not transferable. All warranty claims of any nature are barred if the case has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

For complete warranty details, see www.peli.com/WARRANTY

Distributed by:

Follow us on:



©2020 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com.
Part No. 0030-ALS-001E JAN 20

Check out our
video on RALS!

RALS
Power.
Safety.
Clean Energy.

