

LEARN MORE ABOUT + OUR PRODUCTS



www.peli.com



AVAILABLE IN 18 LANGUAGES!

www.pelicatalogue.com



www.peli.com/webinars



EMEA

EUROPE, MIDDLE EAST & AFRICA HEADQUARTERS

PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 7
08025 • Barcelona, Spain
Tel +34 934 674 999
Fax +34 934 877 393
www.peli.com

FRANCE

PELI PRODUCTS FRANCE
S.A.S.
20/22 Rue des Petits Hôtels
75010 Paris, France
Tel +33 (0)1 44 83 95 63
Fax +33 (0)1 44 83 95 68
www.peli.com

UK

PELI HARDIGG UK
Unit 4, Brookfield Industrial Estate
Leaçon Road
Ashford Kent TN23 4TU
Tel + 44 (0) 1233 895 895
Fax +44 (0) 1233 895 899
www.peli.com

U.S.A.

U.S.A. & GLOBAL HEADQUARTERS

23215 Early Avenue
Torrance, CA 90505 USA
Tel 310.326.4700
800.473.5422 (Outside CA)
Fax 310.326.3311
www.pelican.com

GERMANY

PELI PRODUCTS GERMANY GmbH
Düsseldorf Kö-Bogen
Business Center
Königsallee 2b, 5th Floor
40212 Düsseldorf, Germany
Tel +49 (0) 211 882 42 401
Fax +49 (0) 211 882 42 200
www.peli.com

UAE

PELICAN PRODUCTS FZE
JAFZA One Building A office 1511/1512
Jebel Ali Free Zone gate 5
P.O.Box 261008
Dubai – United Arab Emirates
Tel +971 4 8876550
Fax +971 4 8876549
www.pelican.com
www.peli.com

TURKEY

PELI PRODUCTS ANKARA
BRANCH OFFICE
Beştepe Mahallesi,
Nergis Sokak No:7/2
Via Flat İş Merkezi,
Plaza Cubes No:87
Tel +90 312 248 13 86
www.peli.com

PELICAN HARDIGG

147 North Main Street
South Deerfield, MA 01373
Tel (800) 542 73 44
Fax (413) 665 8330
www.pelican.com

* We also have offices in Canada, Japan, China, Australia, South Korea and India

PELI LIMITED LIFETIME* WARRANTY

Peli Products, S.L.U. ("Peli") guarantees its lights and headlamps for a lifetime* against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see www.peli.com/WARRANTY

* Lifetime guarantee not applicable where prohibited by law.

Distributed by:

Follow us on:



©2020 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com. Part No. 0030-000-501E JAN20

Learn all about ATEX Directive 2014/34/EU

Need to comply with ATEX Directives

PELI™ LIGHTS

CATALOGUE

JANUARY 2020



SINCE 1976



LIFETIME GUARANTEE*

+ TABLE OF CONTENTS

PERFORMANCE	3
SAFETY	4-5
PELI LIGHTS	
Small Lights	6
Medium Torches	7-9
Large Lights	10
Atex Torches	11-15
Tactical Lights	16-18
Headlights	19-20
Right Angle Lights	21
PELI LIGHT MOUNTING & HOLSTER - LIGHTING FEATURES	22
SPECIFICATIONS	23-25
FULL LINE OVERVIEW	26-27



PERFORMANCE

+ STANDARDS AND RATINGS (Applicable to torches only)




LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.




RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon “on a clear night in an open field”).



WATER PROOF/SUBMERSIBLE

Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.
Submersible // IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

ANSI STANDARDS □ (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light’s features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

+ GLOSSARY OF TERMS

CANDELA A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

LUX The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

LUMEN A unit of measurement of the amount of brightness that comes from a light source. Lumens define “luminous flux,” which is energy within the range of frequencies we perceive as light.

INTEGRATING SPHERE An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (INGRESS PROTECTION) – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

RECHARGEABLE Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.



SAFETY

IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exacting requirements of ATEX directive 2014/34/EU, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

CE II 1G EX IA OP IS IIC T4 GA

ATEX code corresponding to the 1975Z0 torch

Need more information about ATEX?
Please visit www.peli.com/atex



+ COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATION

NEW! Download our poster on ATEX Directive 2014/34/EU.




HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS I	Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	<ul style="list-style-type: none"> – Oil Refinery – – Paint Warehouse – – Offshore Oil Rig – – Spray Booth – 	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST ↑ ↓ LEAST
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
CLASS II	Combustible Dusts (Metals [Div.1 only], Coal, Grain)	<ul style="list-style-type: none"> – Coal Mine – – Grain Silo – – Munitions Factory – – Hay Storage Facility – 	Division 1 (Hazard Likely)	Category 1 / Zone 20 (Hazard Certain)	
			Division 2 (Hazard Not Likely)	Category 2 / Zone 21 (Hazard Likely)	
CLASS III	Ignitable Fibers & Flyings (Machined Magnesium)	<ul style="list-style-type: none"> – Paper Mill – – Woodworking Facility – – Textile Mill – – Cotton Gin – 	Division 1 (Hazard Likely)	N/A	
			Division 2 (Hazard Not Likely)	N/A	

* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

US CLASSIFICATIONS		EUROPEAN CLASSIFICATIONS	
Division 1: Where volatile substances can exist all of the time or some of the time under normal operating conditions.	Division 2: Where volatile substances are not likely to exist under normal operating conditions.	Category 1 / Zone 0: Flammable material present for long periods (more than 1.000 hours* a year).	Category 3 / Zone 2: Flammable material present for short periods (less than 10 hours* a year).
		Category 2 / Zone 1: Flammable material present in normal operation (10- 1.000 hours* a year).	

* These hours are guidelines adopted by various organisations. They are not coming from official ATEX sources.

+ DIAGRAM OF CLASS / DIVISIONS / ZONES

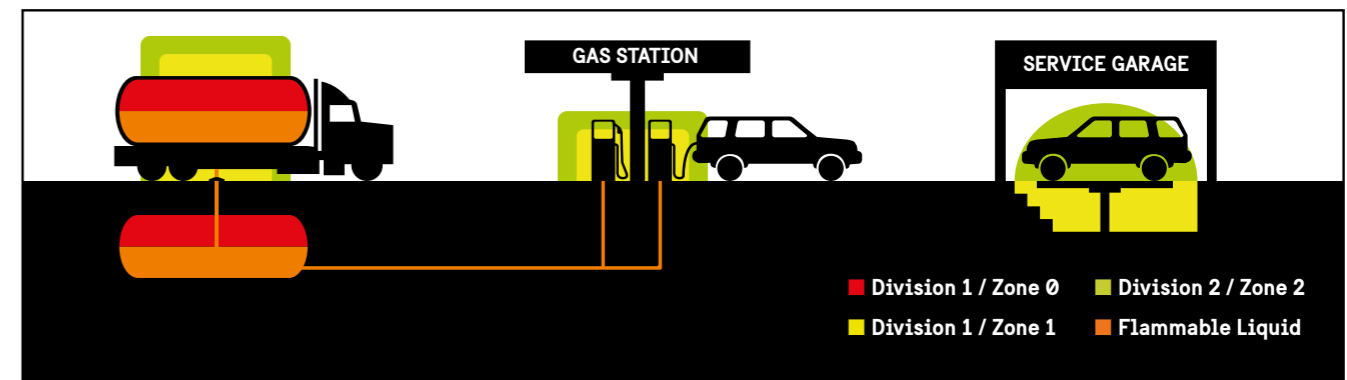

SMALL LIGHTS

When compact is a must or just a convenience, choose from Peli's range of powerful lights. Whether composite or alloy, certified or coloured, you'll find the perfect model for your next job.



PELI SMALL LIGHTS

1910

LIGHT SOURCE//
LED
BATTERIES//
1 AAA Alkaline (included)
LENGTH//
9.7 cm (3.8")
MODES//
High / Low



LUMENS	106
RUN TIME	UP TO 4h

1920

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
14.0 cm (5.5")
MODES//
High / Low



LUMENS	224
RUN TIME	UP TO 8h 45m

L1™ 1930

LIGHT SOURCE//
LED
BATTERIES//
4 LR 44 Alkaline (included)
LENGTH//
6.7 cm (2.64")
CERTIFICATIONS//
CI, DI/CII, D2



LUMENS	12
RUN TIME	4h 15m

SAFETY CERTIFIED

MEDIUM TORCHES

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. And when hazardous areas are present, you can count on Peli's line of safety certified lighting tools. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your torch in an emergency.



PELI MEDIUM TORCHES

SABRELITE™ 2010

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
20.6 cm (8.11")
CERTIFICATIONS//
CI II III, D1 IECEx ia



LUMENS	161
RUN TIME	22h



Photoluminescent 2013PL Shroud

STEALTHLITE™ 2410 LED

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
CI II III, D1 IECEx ia



LUMENS	126
RUN TIME	7h 30m

STEALTHLITE™ 2460



LIGHT SOURCE//
LED
BATTERIES//
4 NiMH (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
CI II, D2



LUMENS
112
RUN TIME
4h 30m

3310PL PHOTOLUMINESCENT

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline (included)
LENGTH//
15.6 cm (6.14")
MODES//
High / Low / Flashing
(torch body glows in the dark)



LUMENS
234
RUN TIME
190h
UP TO

(Photoluminescent)

3310 ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline (included)
LENGTH//
15.6 cm (6.14")
INCLUDES//
3310PL and Wall Mountable Case
(torch body glows in the dark)



LUMENS
378
RUN TIME
202h
UP TO

(Photoluminescent)

3310R



LIGHT SOURCE//
LED
BATTERIES//
1 Lithium-Ion (included)
LENGTH//
15.5 cm (6.11")
MODES//
High / Low / Boost / Flashing / Full Time Battery Level Indication



LUMENS
1067
RUN TIME
50h

Right Angle version available
(3310R-RA). See page 21

5-SERIES TORCHES. IPX8 RATED.

Peli 5 Series lights feature slide beam technology. The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.



5000

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline
LENGTH//
14.2 cm (5.59")
MODES//
High / Low / Flashing



LUMENS
202
RUN TIME
7h

5010

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline
LENGTH//
15.9 cm (6.26")
MODES//
High / Low / Flashing



LUMENS
392
RUN TIME
26h

5020

LIGHT SOURCE//
LED
BATTERIES//
4 AAA Alkaline
LENGTH//
14.9 cm (5.87")
MODES//
High / Medium / Low / Flashing



LUMENS
586
RUN TIME
27h

5050R



LIGHT SOURCE//
LED
BATTERIES//
1 18650 Lithium
LENGTH//
15.6 cm (6.16")
MODES//
Boost / High / Low / Flashing



LUMENS
393
RUN TIME
40h



USB



LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Peli is also a leader of high performance lithium-ion technology in portable lighting.

PELI LARGE LIGHTS



9410L LED LANTERN



LIGHT SOURCE//
LED

BATTERIES//
6 Lithium-ion 18650 (included)

LENGTH//
22.2 cm (8.75")

MODES//
High / Low / Flashing
Full Time Battery Indicator




LUMENS
2207
RUN TIME
11h

ATEX TORCHES



Zone 0 & 1 (Cat. 1 & 2)

Peli's extense range of Zone 0 and Zone 1 torches complies with the highest standards of the ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements. Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.

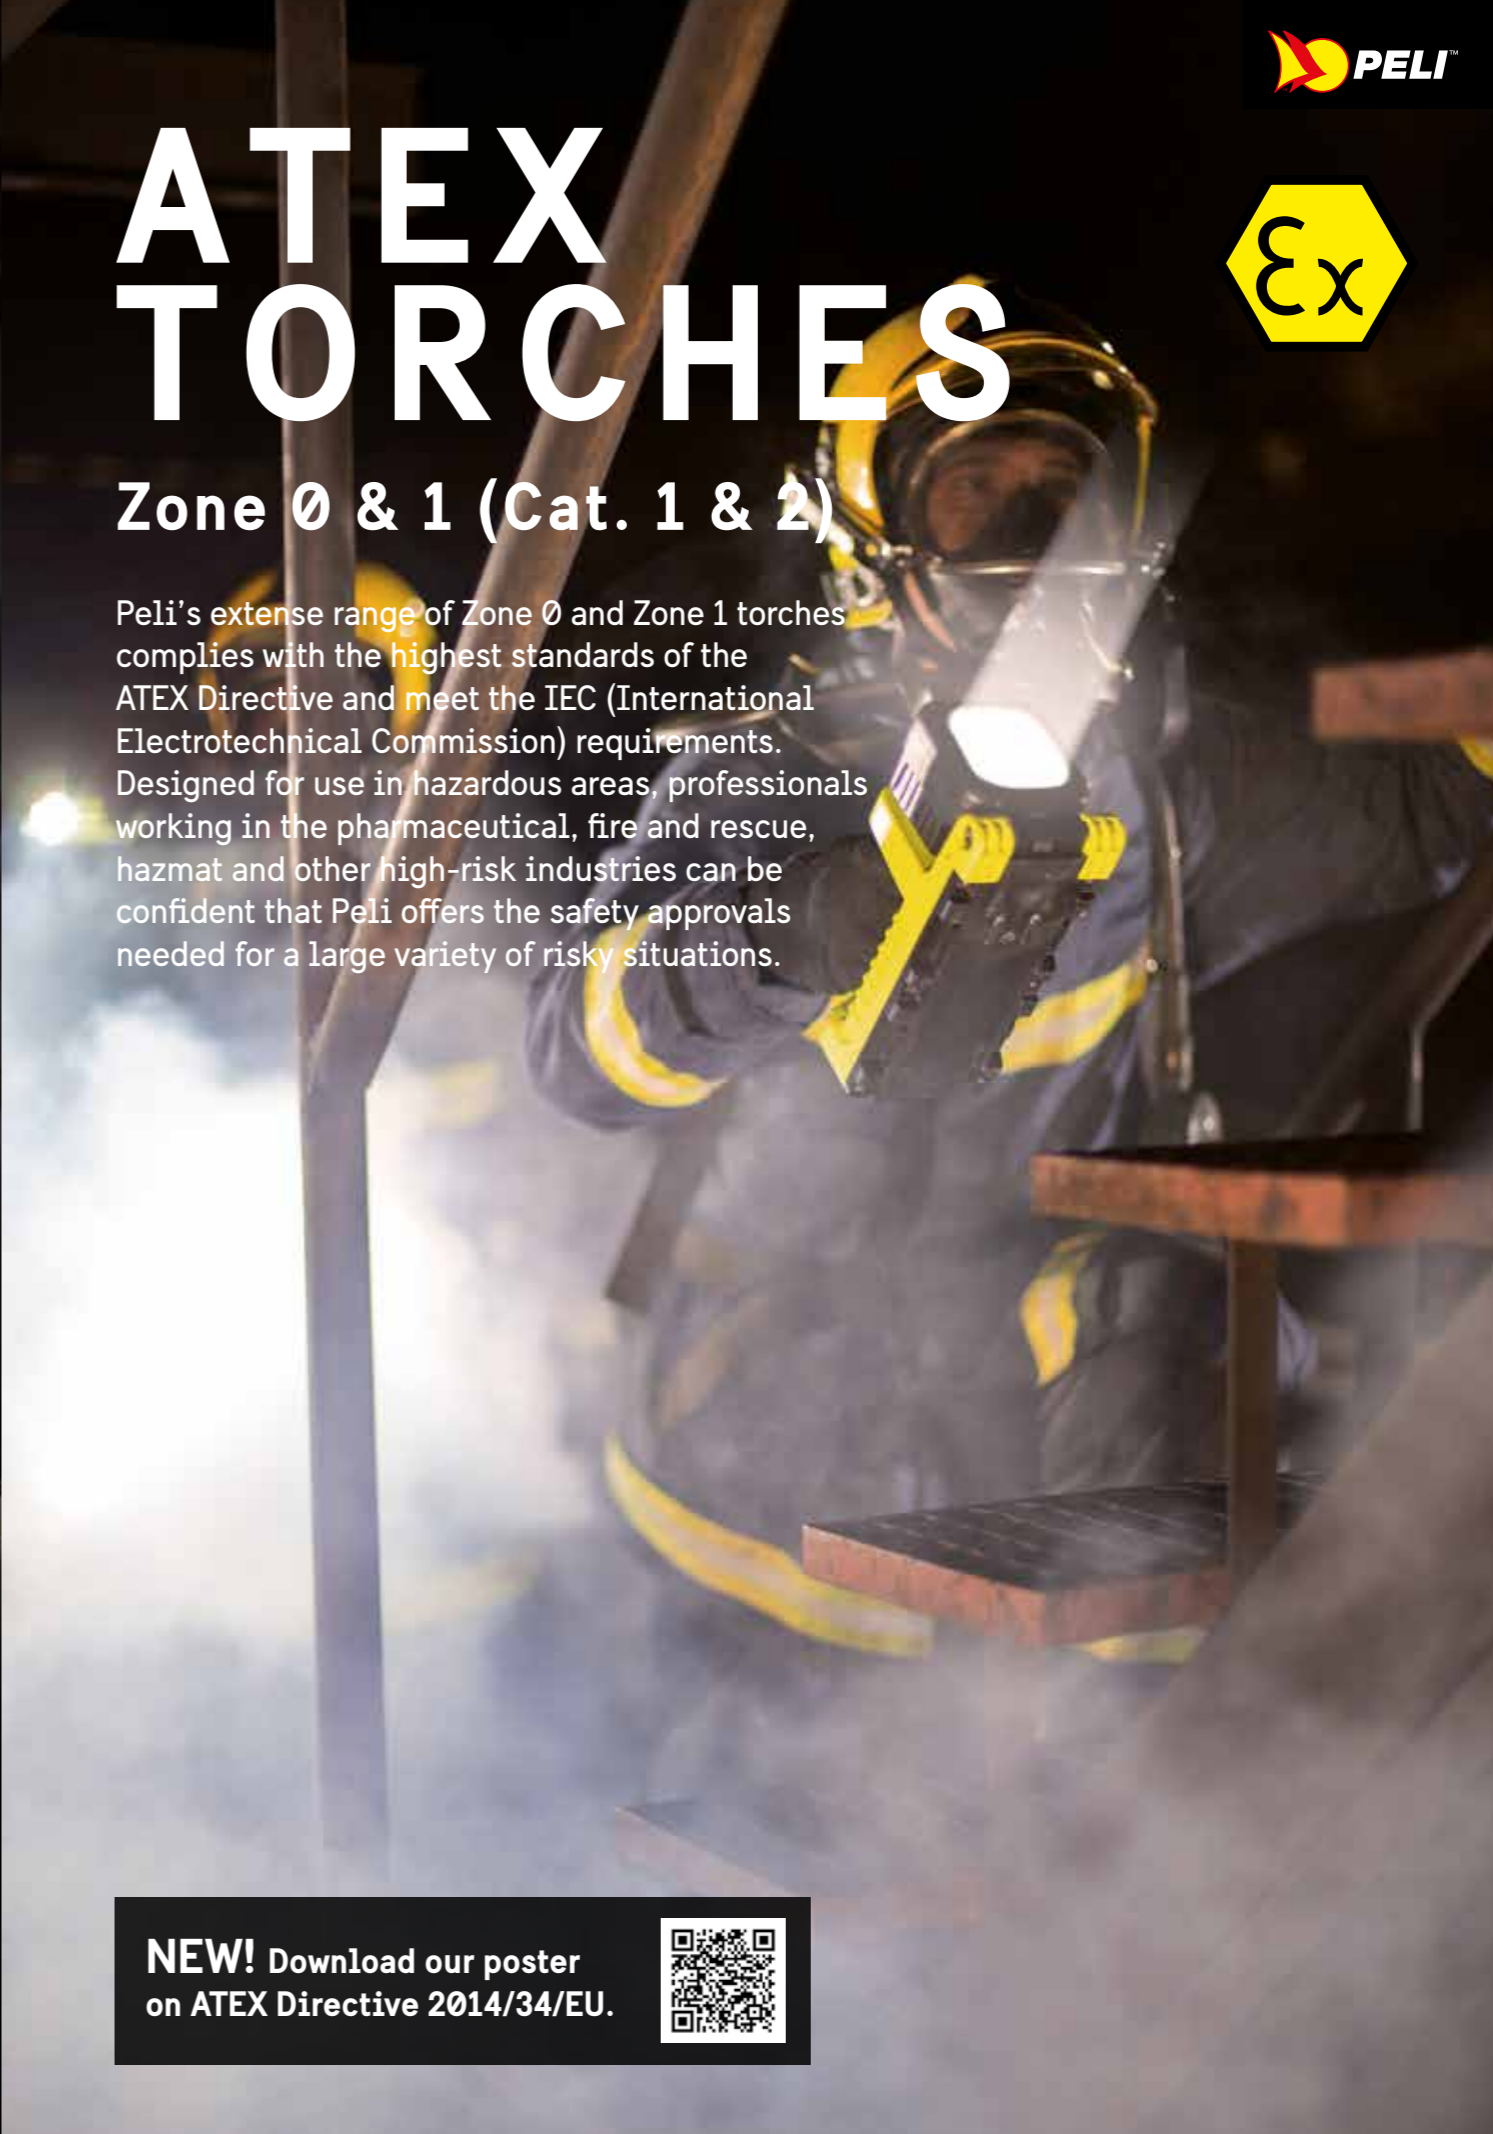

PELI ATEX TORCHES

NEW! Download our poster on ATEX Directive 2014/34/EU.





L1™ 1930Z0

LIGHT SOURCE//
LED

BATTERIES//
4 LR 44 Alkaline (included)

LENGTH//
6.7 cm (2.64")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T6/T4 Ga



STEALTHLITE™ 2460Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH (included)

LENGTH//
17.8 cm (7")

CERTIFICATIONS//
II 2 G Ex ib IIC T3 Gb



HEADSUP LITE™ 2610Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
3.8 cm (1.49")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



MITYLITE™ 1965Z0 (MOQ**)

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
13.9 cm (5.48")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



MITYLITE™ 1975Z0

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
14.6 cm (5.75")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



HEADSUP LITE™ 2690Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
7.1 cm (2.81")

CERTIFICATIONS//
I M1 Ex ia 1 Ma, II 1 G Ex ia IIC T4 Ga,
II 1D Ex ia IIIC T65°C Da



HEADSUP LITE™ 2745Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
High / Low



MITYLITE™ 1975Z1

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline (included)

LENGTH//
14.6 cm (5.75")

CERTIFICATIONS//
II 2 G Ex ib op is IIB T4 Gb



SABRELITE™ 2010Z0

LIGHT SOURCE//
LED

BATTERIES//
3 C Alkaline (not included)

LENGTH//
20.6 cm (8.11")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4/T3 Ga



Photoluminescent
2013PL Shroud

HEADSUP LITE™ 2755Z0


LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
High / Low / Flashing



VB3™ 2220Z1

LIGHT SOURCE//
LED

BATTERIES//
2 CR2032 Lithium (included)

LENGTH//
8.9 cm (3.50")

CERTIFICATIONS//
II 2 G Ex ib op is IIC T6 Gb




STEALTHLITE™ 2410Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
17.8 cm (7")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da




HEADSUP LITE™ 2765Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



* For more information on ATEX, see page 4-5. ** Only available upon min. order quantity

* For more information on ATEX, see page 4-5



3415MZ0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline

LENGTH//
18.9 cm (7.44")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
Spot / Flood / Flashing / Spot/Flood



Includes magnetic clip



LITTLE ED™ 3610Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
19.1 cm (7.51")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



HEADSUP LITE™ 2785Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
7.6 cm (3.00")

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb

MODES//
High / Medium / Low / Downcast / Spot / Flashing



3315Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.6 cm (6.14")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da



LITTLE ED™ 3660Z1

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH (included)

LENGTH//
19.1 cm (7.51")

CERTIFICATIONS//
II 2 G Ex ib IIC T4 Gb



3715Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline

LENGTH//
13.6 cm (5.36")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da

MODES//
High / Low / Downcast



PhotoLuminescent 3713PL Shroud

3315RZ0

LIGHT SOURCE//
LED

BATTERIES//
1 Lithium Iron Phosphate (included)

LENGTH//
15.5 cm (6.11")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
High / Low / Flashing / Full Time Battery Level Indication



Life expectancy +2,000 cycles!

Right Angle version available (3315RZ0-RA).



3315RZ1

LIGHT SOURCE//
LED

BATTERIES//
1 Lithium-Ion (included)

LENGTH//
15.5 cm (6.11")

CERTIFICATIONS//
II 2 G Ex ib op is IIC T4 Gb

MODES//
High / Low / Flashing / Full Time Battery Level Indication



Right Angle version available (3315RZ1-RA).



3325Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.4 cm (6.06")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



3345Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline

LENGTH//
18.4 cm (7.25")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
Spot / Flood / Spot/Flood / Full Time Battery Level Indication



3765Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH (included)

LENGTH//
13.6 cm (5.36")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T3 Ga

MODES//
High / Low / Downcast



9415Z0 LED LANTERN

LIGHT SOURCE//
LED

BATTERIES//
4 C NiMH (included)

LENGTH//
22.2 cm (8.75")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga



THE PELI 3715Z0 IS AN ABSOLUTE FAVOURITE

SURVIVAL + STORIES

Compact and it really packs a lot of light. The three types of light are really convenient for different purposes. For instance, the large light to explore incidents and the three small LED lights to read maps or walk in dark areas. I also use this light to train in our hazmat suits. The thick rubber gloves are not an issue when working with the light. The button on top is really good to operate and the grip on the side helped me during the training. This light is really impressive. Compared to our current lights, it really stands out!

Dutch firefighter - Fire Dpt. Brabant-Noord, Boxmeer

Guido Siebers

TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.



PELI TACTICAL LIGHTS

PELI TACTICAL LIGHTS

2370

LIGHT SOURCE// LED
 BATTERIES// 2 AA Alkaline (included)
 LENGTH// 16.3 cm (6.43")
 MODES// High / Low / Red / Blue



LUMENS
106
 RUN TIME
 UP TO
41h 15m

7000

LIGHT SOURCE// LED
 BATTERIES// 2 CR123 Lithium-Ion (Included)
 LENGTH// 13.5 cm (5.31")
 MODES// High / Medium / Low



LUMENS
774
 RUN TIME
 UP TO
13h

7060

LIGHT SOURCE// LED
 BATTERIES// 1 Lithium-Ion (included)
 LENGTH// 22 cm (8.65")
 MODES// High / Strobe / Medium / Low / Self Programmable



LUMENS
535
 RUN TIME
 UP TO
68h

7070R

LIGHT SOURCE// LED
 BATTERIES// 1 Lithium-Ion 18650 (included)*
 LENGTH// 17.5 cm (6.88")
 MODES// High / Medium / Low / Full Time Battery Level Indication / Dual Switches



LUMENS
1219
 RUN TIME
 UP TO
32h



*Multi-Batterie.
 Supports also 2 CR123

2350

LIGHT SOURCE// LED
 BATTERIES// 1 AA Alkaline (included)
 LENGTH// 10.7 cm (4.23")
 MODES// High / Strobe / Low



LUMENS
178
 RUN TIME
 UP TO
21h

2360 LED

LIGHT SOURCE// LED
 BATTERIES// 2 AA Alkaline (included)
 LENGTH// 15.7 cm (6.2")
 MODES// High / Strobe / Low



LUMENS
375
 RUN TIME
 UP TO
13h



7100



LIGHT SOURCE//
LED

BATTERIES//
1 Lithium-Ion 14500 (included)

LENGTH//
13 cm (5.12")

MODES//
High / Strobe / Medium / Low / Full Time Battery Level Indication



LUMENS
695
RUN TIME
UP TO
9h 15m



*Multi-Batterie.
Supports also 1 AA

7600



LIGHT SOURCE//
LED

BATTERIES//
1 Lithium-Ion 18650 (included)

LENGTH//
15.7 cm (6.19")

MODES//
High / Strobe / Medium / Low / Full Time Battery Level Indication



LUMENS
944
RUN TIME
UP TO
29h



*Multi-Batterie.
Supports also 2 CR123

7110

LIGHT SOURCE//
LED

BATTERIES//
1 AA Alkaline (included)*

LENGTH//
11.8 cm (4.63")

MODES//
High / Medium / Low



LUMENS
445
RUN TIME
UP TO
13h

*Multi-Batterie.
Supports also 1 CR123

7610

LIGHT SOURCE//
LED

BATTERIES//
1 AA Alkaline (included)*

LENGTH//
13.8 cm (5.44")

MODES//
High / Medium / Low



LUMENS
1018
RUN TIME
UP TO
33h

*Multi-Batterie.
Supports also 1 CR123, 2 CR123, Lithium Ion

7620

LIGHT SOURCE//
LED

BATTERIES//
2 AA Alkaline (included)*

LENGTH//
17.3 cm (6.81")

MODES//
High / Medium / Low



LUMENS
1124
RUN TIME
UP TO
37h

*Multi-Batterie.
Supports also 2 CR123, 3 CR123, Lithium Ion

8060



LIGHT SOURCE//
LED

BATTERIES//
4 NiMH C (included)

LENGTH//
32.2 cm (12.67")

MODES//
High / Strobe / Medium / Low /
Flashing / Self Programmable



LUMENS
803
RUN TIME
UP TO
69h



HEADLAMPS

With up to 558 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.



Photo by HRC

2720 HEADLAMP

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
6.3 cm (2.48")
MODES//
Variable Light Output / Spot to Flood /
Red Night Vision Friendly LEDs



LUMENS
200
UP TO
RUN TIME
103h



**GESTURE
ACTIVATION
CONTROL**

2740 HEADLAMP

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
5.7 cm (2.25")
MODES//
High / Low /
Flashing / Red LED



LUMENS
66
UP TO
RUN TIME
21h

2750 HEADLAMP

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
5.7 cm (2.25")
MODES//
High / Low / Flashing /
Red LED / Low Battery Warning



LUMENS
259
UP TO
RUN TIME
11h

■ ■ (Photoluminescent)

2760 HEADLAMP

LIGHT SOURCE//
LED
BATTERIES//
3 AAA Alkaline (included)
LENGTH//
5.7 cm (2.25")
MODES//
High / Medium / Low / Downcast /
Flashing / Red LED / Full-time Battery
Level Indicator



LUMENS
289
UP TO
RUN TIME
11h

■ ■ (Translucent Red)

2780R HEADLAMP



LIGHT SOURCE//
LED
BATTERIES//
1 Lithium-Ion 18650 (included)
LENGTH//
7.6 cm (3.00")
MODES//
High / Medium / Low
Flashing / Downcast
Full-time Battery Level Indicator



LUMENS
558
UP TO
RUN TIME
7h 30m

■ ■ ■ (Photoluminescent)
3 Interchangeable Covers Included



Photo by Alan Rouman

RIGHT ANGLE LIGHTS

Firefighters put everything on the line and the correct lighting tools are critical. Right angle (90°) torches often worn on turnout coats offer hands-free performance. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.

3310R-RA



LIGHT SOURCE//
LED
BATTERIES//
1 Lithium-Ion 18650 (included)
LENGTH//
21 cm (8.27")
MODES//
High / Low / Flashing / Boost / Full Time Battery Level Indication



LUMENS
948
UP TO
RUN TIME
50h

3410M

LIGHT SOURCE//
LED
BATTERIES//
3 AA Alkaline
LENGTH//
18.9 cm (7.44")
MODES//
Spot / Flood / Spot/Flood



Includes
magnetic clip

LUMENS
653
UP TO
RUN TIME
61h

■ (Photoluminescent)

LIGHT MOUNTING SYSTEMS AND HOLSTERS



FRONT SIGHT MOUNT
Fits Peli Lights - 2320, 2330, 2390, 7000.
Includes Remote Pressure Switch. For use with:
AR15, M16, and M4 Carbine (special orders only).

CAT. NO. 610



FOREGRIP MOUNT
Fits Peli Lights - 2320, 2330, 2390, 7000. Includes Remote Pressure
Switch. For use with: Heckler, and Koch MP5 (special orders only).

CAT. NO. 630



SIDE SLING MOUNT
Fits Peli Lights - 2320, 2330, 2390, 7000.
Includes Remote Pressure Switch. For use with:
AR15, M16, and M4 Carbine (special orders only).

CAT. NO. 620



REMOTE PRESSURE SWITCH
Our tactical pressure switch replaces the standard tailcap on the torch.
A 6" cord attached to a 2" pressure-sensitive switch mounts to the
foregrip. Fits Peli Lights: 2320, 2330, 2390 (Cat. No. 2326). COLOUR:
Black // WT.: 2.0 oz. (special orders only).

CAT. NO. 2326

	CAT. NO 7070RWH	CAT. NO. 7078 NYLON HOLSTER	CAT. NO. 7106	CAT. NO. 7116	CAT. NO. 7606	CAT. NO. 7616 CAT. NO. 7617	CAT. NO. 7627	CAT. NO. 8057 NYLON HOLSTER
HOLSTER STYLES								
CAT. NO.								
7060								
7070R	•							
7100			•					
7110				•				
7600					•			
7610						•		
7620							•	
8040								•
8050								•

	CAT. NO. 710	CAT. NO. 711	CAT. NO. 750	CAT. NO. 770	CAT. NO. 780 FULL HOUSE	CAT. NO. 781 ACE	CAT. NO. 782 ALL IN	CAT. NO. 783 DOUBLE DOWN
LIGHT AND HEADLIGHT HOLDER STYLES								
CAT. NO.								
2140			•					
2250	•		•					
2300			•	•		•		
2320			•	•		•		
2330			•	•		•		
2340/NVG		•	•	•		•		
2350				•		•		
2360				•		•		
2370				•		•		
2380				•		•		
2390				•		•		
2400/2400N/NVG/PL	•	•	•	•	•	•		
2410/PL	•	•	•	•	•	•		
2430	•	•	•	•	•	•		
2450	•	•	•	•	•	•		
2460	•	•	•	•	•	•		
3310							•	
3315							•	
3320							•	
3330							•	
7000							•	
All Headlamps								•

PELI LIGHTING TOOLS: MORE THAN A TORCH.

Here are just a few features that make our lighting tools shine:



SELF PROGRAMMABLE
(Selected models only)



GESTURE ACTIVATION
(On selected models only)



USB RECHARGEABLE
(On selected models only)



PHOTOLUMINESCENT DESIGNS
(Selected models only)



PIVOTING 60° HEAD
(On selected models only)



DOWNCAST LIGHTING FEATURES
(On selected models only)



LEGENDARY LIFETIME* GUARANTEE

*Lifetime guarantee not applicable where prohibited by law.

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS
SMALL LIGHTS	1910	1 AAA Alkaline ^A	0.04	9.7	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■
	1920	2 AAA Alkaline ^A	0.06	14	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■
	1930	4 LR 44 Alkaline ^A	0.03	6.7	12	4h 15m	17	70	IPX4	CI, D1/CII, D2	■ ■
MEDIUM TORCHES	2010	3 C Alkaline	0.38	20.6	161	22h	160	6398	IPX7	CI II III, D1	■
	2410	4 AA Alkaline ^A	0.21	17.8	126	7h 30m	165	6837	IPX7	CI II III, D1	■
	2460	4 Ni-MH ^A	0.22	17.8	112	4h 30m	153	5828	IPX7	CI II, D2	■ ■
	3310PL	3 AA Alkaline ^A	0.18	15.6	234*, 28***	8h 45m*, 190h***	240*, 81m***	14500*, 1649***	IPX7	N/A	■ (photoluminescent)
	3310ELS	3 AA Alkaline ^A	0.18	15.6	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3310R	1 Lithium-Ion ^A	0.15	15.5	403*, 21***, 1067****	2h 30m*, 50h***	149*, 34***, 243****	5591*, 281***, 14808****	IPX8	N/A	■
	5000	2 AAA Alkaline ^A	0.068	14.2	202*, 21**	1h 15m*, 7h**	69*, 21**	1176*, 111**	IPX8	N/A	■
	5010	2 AA Alkaline ^A	0.145	15.9	392*, 22***	2h 15m*, 26h***	184*, 43***	8507*, 452***	IPX8	N/A	■
	5020	4 AAA Alkaline	0.207	14.9	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250*, 147**, 44***	15672*, 5368**, 480***	IPX8	N/A	■
	5050R	1 18650 Lithium ^A	0.164	15.6	393*, 21***, 883****	2h 30m*, 40h**	134*, 30***, 201****	4488*, 224**, 10093****	IPX8	N/A	■
LARGE LIGHTS	9410L	6 Lithium-ion 18650 ^A	1.27	22.2	2207*, 463***	3h 15m*, 11h***	453*, 207***	51304*, 10710***	IPX4	N/A	■ ■
TACTICAL LIGHTS	2350	1 AA Alkaline ^A	0.1	10.7	178*, 15***	2h 15m*, 21h***	130*, 37***	4196*, 345***	IPX7	N/A	■
	2360	2 AA Alkaline ^A	0.15	15.7	375*, 29***	2h 30m*, 13h***	192*, 53***	9187*, 705***	IPX8	N/A	■
	2370	2 AA Alkaline ^A	0.18	16.3	106*, 13***	3h 45m*, 41h 15m***	158*, 52***	6283*, 684***	IPX4	N/A	■
	7000	2 CR123 Lithium ^A	0.16	13.5	774*, 457**, 99***	1h 15m*, 1h 45m**, 13h***	246*, 176**, 83***	14768*, 7712**, 1738***	IPX7	N/A	■
	7060	1 Lithium-Ion ^A	0.29	22	535*, 218**, 26***	3h 45m*, 12h**, 68h***	207m*, 131m**, 44m***	10707*, 4297**, 481***	IPX4	N/A	■

*High | **Medium | ***Low | ****Boost | ^A Batteries Included | Additional approvals may apply. For details go to www.peli.com

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS	
TACTICAL LIGHTS	7070R	1 Lithium-Ion 18650 ^A	0.22	17.5	1219*, 626**, 32***	2h 15m*, 4h 15m**, 32h***	235*, 168**, 40***	13872*, 7066**, 400***	IPX8	N/A	■
	7100	1 Lithium-Ion 14500 ^A	0.12	13	695*, 348**, 33***	1h 15m*, 1h 30m**, 9h 15m***	194*, 130**, 38***	9413*, 4247**, 358***	IPX8	N/A	■
	7110 ¹	1 AA Alkaline ^A	0.11	11.8	445*, 214**, 23***	1h*, 1h 30m**, 13h***	93*, 62**, 20***	6053*, 2695**, 288***	IPX8	N/A	■
	7600	1 Lithium-Ion 18650 ^A	0.19	15.7	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8	N/A	■
	7610 ¹	1 AA Alkaline ^A	0.15	13.8	1018*, 531**, 25***	1h 30m*, 2h**, 33h***	227*, 151**, 33***	12856*, 5674**, 273***	IPX8	N/A	■
	7620 ²	2 AA Alkaline ^A	0.19	17.1	1124*, 528**, 28***	2h*, 3h**, 37h***	243*, 155**, 35***	14824*, 5974**, 315***	IPX8	N/A	■
	8060	4 C NiMH ^A	0.66	32.2	803*, 447**, 25***	2h 30m*, 4h**, 69h***	359*, 265**, 62***	32252*, 17492**, 958***	IPX4	N/A	■
	2720	3 AAA Alkaline ^A	0.11	6.3	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
	2740	3 AAA Alkaline ^A	0.09	5.7	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■
	2750	3 AAA Alkaline ^A	0.1	5.7	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ (photoluminescent)
HEAD LAMPS	2760	3 AAA Alkaline ^A	0.1	5.7	289*, 156**, 97***, 42****	1h 30m*, 3h 15m**, 5h 30m**, 11h****	101*, 66**, 48***, 19****	2540*, 1097**, 567***, 88****	IPX4	N/A	■ (translucent)
	2780R	1 Lithium-Ion 18650 ^A	0.21	7.6	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ (photoluminescent)
	3310R-RA	1 Lithium-Ion 18650 ^A	0.22	21	385*, 20***, 948****	2h 30m*, 50h***	147*, 32***, 236****	5424*, 267***, 13944****	IPX8	N/A	■
RIGHT ANGLE LIGHTS	3410M	3 AA Alkaline	0.2	18.9	653*, 97**, 25***	5h*, 19h**, 61h***	184*, 67**, 34***	8504*, 1129**, 292***	IPX8	N/A	■ (photoluminescent)

*High | **Medium | ***Low | ****Downcast | ***** Boost | ^ABatteries Included | ¹These values are based on the use of 1 AA battery | ²These values are based on the use of 2 AA batteries
Additional approvals may apply. For details go to www.peli.com

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUNTIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	APPROVALS	COLOURS
1930Z0	4 LR 44 Alkaline ^A	0.03	6.7	12	4h 15m	17	70	IPX4	II 1 G Ex ia op is IIC T6/T4 Ga	□
1965Z0	2 AAA Alkaline ^A	0.05	13.9	87	2h 30m	41	429	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T90°C Da	■
1975Z0	2 AAA Alkaline ^A	0.054	14.6	117	2h 15m	24	141	IPX8	II 1 G Ex ia op is IIC T4 Ga	■
1975Z1	2 AAA Alkaline ^A	0.054	14.6	94	8h 15m	22	122	IPX4	II 2 G Ex ib op is IIB T4 Gb	■
2010Z0	3 C Alkaline	0.38	20.6	129	22h	135	4582	IPX7	II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIIC T135c T200c Da IP6X	■
2220Z1	2 CR2032 Lithium ^A	0.03	8.9	9	34h	12	38	IPX4	II 2 G Ex ib op is IIC T6 Gb	■
2410Z0	4 AA Alkaline ^A	0.21	17.8	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■
2460Z1	4 AA Ni-MH ^A	0.22	17.8	181	5h	181	8235	IPX7	II 2 G Ex ib IIC T3 Gb	■
2610Z0	3 AAA Alkaline ^A	0.91	3.8	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	II 1 G Ex ia op is IIC T4 Ga	■
2690Z0	3 AAA Alkaline ^A	0.12	7.1	74	11h	92	2124	IPX7	I M1 Ex ia l Ma, II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T65°C Da	■
2745Z0	3 AAA Alkaline ^A	0.94	5.7	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IPX4	II 1 G Ex ia op is IIC T4 Ga	■
2755Z0	3 AAA Alkaline ^A	0.1	5.7	115*, 58***	8h*, 16h***	61*, 43***	925*, 455***	IP54	II 1 G Ex ia op is IIC T4 Ga	■
2765Z0	3 AAA Alkaline ^A	0.1	5.7	141*, 27***	5h30m*, 14h***	78*, 9***	1512*, 22***	IPX54	II 1 G Ex ia op is IIC T4 Ga	■
2785Z1	4 AA Alkaline ^A	0.3	7.6	Main: 215*, 106**, 22***	Main: 5h*, 13h**, 98h***	Main: 108*, 76**, 34***	Main: 2911*, 1445**, 290***	IP54	II 2 G Ex ib IIC T4 Gb	■
3315Z0	3 AA Alkaline ^A	0.18	15.6	138	19h	146	5350	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da	■
3315RZ0	1 Lithium Iron Phosphate ^A	0.17	21	132*, 15***	5h*, 34h***	108*, 35***	2931*, 308***	IPX7	II 1 G Ex ia op is IIC T4 Ga	■
3315RZ1	1 Lithium-Ion ^A	0.18	15.5	176*, 22***	5h 30m*, 48h***	127*, 44***	4022*, 492***	IPX7	II 2 G Ex ib op is IIC T4 Gb	■
3325Z0	3 AA Alkaline ^A	0.17	15.4	155	16h	140	4926	IPX7	II 1 G Ex ia IIC T4 Ga	■
3345Z0	3 AA Alkaline	0.21	18.4	267 (Flood/Spot), 115 (Flood), 207 (Spot)	5h (Flood/Spot), 13h (Flood), 9h (Spot)	126 (Flood/Spot), 16 (Flood), 134 (Spot)	4000 (Flood/Spot), 61 (Flood), 4523 (Spot)	IPX7	II 1 G Ex ia op is IIC T4 Ga	■
3415MZ0	3 AA Alkaline	0.2	18.9	329 (Spot/Flood), 174 (Flood), 185 (Spot)	6h (Spot/Flood), 15h (Flood), 14h (Spot)	133 (Spot/Flood), 38 (Flood), 134 (Spot)	4425 (Spot/Flood), 354 (Flood), 4517 (Spot)	IPX8	II 1 G Ex ia op is IIC T4 Ga	■
3610Z0	4 AA Alkaline	0.3	19.1	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	■
3660Z1	4 AA Alkaline ^A	0.3	19.1	181	5h	181	8235	IPX7	II 2 G Ex ib IIC T4 Gb	■
3715Z0	4 AA Alkaline	0.41	13.6	189*, 90**, 23***	4h*, 7h**, 31h***	249*, 157***, 24***	15552*, 6150***, 150***	IPX4	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da	■
3765Z0	4 AA Alkaline ^A	0.41	13.6	194*, 92**, 24***	3h 30m*, 6h 45m**, 20h***	256*, 161***, 24***	16392*, 6454***, 146***	IPX4	II 1 G Ex ia op is IIC T3 Ga	■
9415Z0	4 C NiMH ^A	1.65	22.2	530*, 220***	4h 30m*, 11h 30m***	272*, 166***	18480*, 6914***	IPX4	II 1 G Ex ia IIC T4 Ga	■

*High | **Medium | ***Low | ****Downcast | ^ABatteries Included | Additional approvals may apply. For details go to www.peli.com

SMALL LIGHTS PGS 06			MEDIUM TORCHES PGS 07 - 09								
1910	1920	1930	2010	2410	2460	3310PL	3310ELS	3310R			
MEDIUM TORCHES PGS 07 - 09			LARGE LIGHTS PGS 10		ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 11 - 15						
5000	5010	5020	5050R	9410L	1930Z0	1965Z0	1975Z0	1975Z1			
ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 11 - 15											
2010Z0	2220Z1	2410Z0	2460Z1	2610Z0	2690Z0	2745Z0	2755Z0	2765Z0	2785Z1		
ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 11 - 15											
3315Z0	3315Z0-RA	3315RZ1	3315RZ1-RA	3325Z0	3345Z0	3415MZ0	3610Z0	3660Z1	3715Z0	3765Z0	9415Z0
TACTICAL LIGHTS PGS 16 - 18											
2350	2360	2370	7000	7060	7070R	7100	7110	7600			
TACTICAL LIGHTS PGS 16 - 18			HEADLAMPS PGS 19 - 20			RIGHT ANGLE LIGHTS PGS 21					
7610	7620	8060	2720	2740	2750	2760	2780R	3310R-RA	3410M		