



2025
**FLASHLIGHTS
CATALOGUE**



When you're in a situation that requires a lighting tool, you want to make sure you have the right one. Since 1976, PELI has illuminated the world's darkest and most dangerous places with specialised, professional lighting tools, including ATEX approved models, to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools enable you to accomplish your tasks in a safer and more efficient manner. Engineered in the U.S and Guaranteed for Life.

LIGHTS

INTRODUCTION	4-6
Performance Flashlights	4
Glossary of terms	5
Safety	6
PRODUCTS	8-21
Industrial Lights	8
ATEX Lights	12
Tactical Lights	18
HeadLamps	20
SPECIFICATIONS	22-27
ACCESSORIES & FEATURES	28-31

PERFORMANCE PELI FLASHLIGHTS

STANDARDS AND RATINGS (APPLICABLE TO TORCHES ONLY)



LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.




WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon “on a clear night in an open field”).



WATER PROOF/SUBMERSIBLE

Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.

Submersible // IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

ANSI STANDARDS (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light's features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

GLOSSARY OF TERMS

CANDELA

A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

LUX

The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

LUMEN

A unit of measurement of the amount of brightness that comes from a light source. Lumens define “luminous flux,” which is energy within the range of frequencies we perceive as light.


INTEGRATING SPHERE

An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (INGRESS PROTECTION)

These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating , Liquids vary from 0-8 IP rating).

RECHARGEABLE

Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon 

SAFETY IN EUROPE



IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exact requirements of the European ATEX directive 2014/34/EU, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

CE Ex II 1G EX IA OP IS IIC T4 GA

ATEX code corresponding to the 1975Z0 torch



Need more information about ATEX? Please visit www.peli.com/atex



Download our poster on ATEX Directive 2014/34/EU.



COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATIONS


HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS I	Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	Oil Refinery Paint Warehouse Offshore Oil Rig Spray Booth	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST ↑
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
			Division 2 (Hazard Not Likely)	Category 3 / Zone 2 (Hazard Not Likely)	
CLASS II	Combustible Dusts (Metals [Div.1 only], Coal, Grain)	Coal Mine Grain Silo Munitions Factory Hay Storage Facility	Division 1 (Hazard Likely)	Category 1 / Zone 20 (Hazard Certain)	↓ LEAST
			Division 2 (Hazard Not Likely)	Category 2 / Zone 21 (Hazard Likely)	
CLASS III	Ignitable Fibers & Flyings (Machined Magnesium)	Paper Mill Woodworking Facility Textile Mill Cotton Gin	Division 1 (Hazard Likely)	N/A	
			Division 2 (Hazard Not Likely)	N/A	

* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

US CLASSIFICATIONS		EUROPEAN CLASSIFICATIONS	
Division 1 Where volatile substances can exist all of the time or some of the time under normal operating conditions.	Division 2 Where volatile substances are not likely to exist under normal operating conditions.	Category 1 / Zone 0 Flammable material present for long periods (more than 1.000 hours* a year).	Category 3 / Zone 2 Flammable material present for short periods (less than 10 hours* a year).
		Category 2 / Zone 1 Flammable material present in normal operation (10- 1.000 hours* a year).	

* These hours are guidelines adopted by various organisations. They are not coming from official ATEX sources.

DIAGRAM OF CLASS / DIVISIONS / ZONES

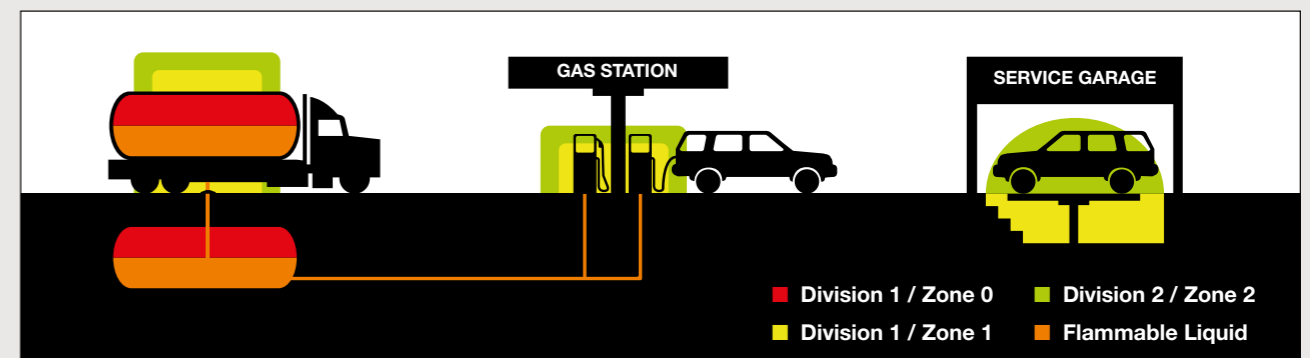

INDUSTRIAL LIGHTS

Engineered for the toughest jobs, Peli industrial lights are designed to deliver unmatched reliability when it matters most. Built with ultra-durable materials, these hand-held lights withstand extreme conditions, from intense heat to heavy impact. With options like photoluminescent "glow-in-the-dark" bodies, you'll never struggle to locate your light in low-visibility situations. Compact enough to clip to a helmet or fit in a pocket, they're the ultimate companion for professionals who need powerful, portable illumination on demand.

SEE ALL



RECHARGEABLE

1910

LIGHT SOURCE
LED

BATTERIES
1 AAA Alkaline (included)

LENGTH
9.7 cm (3.8")

MODES
High / Low



UP TO	LUMENS	RUN TIME
	106	4h



1920

LIGHT SOURCE
LED

BATTERIES
2 AAA Alkaline (included)

LENGTH
14.0 cm (5.5")

MODES
High / Low



UP TO	LUMENS	RUN TIME
	224	8h 45m



1930 L1™

LIGHT SOURCE
LED

BATTERIES
4 LR 44 Alkaline (included)

LENGTH
6.7 cm (2.64")

CERTIFICATIONS
Cl, D1/ClI, D2 IECEx ia



LUMENS	RUN TIME
12	4h 15m



2010 SABRELITE™

LIGHT SOURCE
LED

BATTERIES
3 C Alkaline (not included)

LENGTH
20.6 cm (8.11")

CERTIFICATIONS
Cl II III, D1 IECEx ia



LUMENS	RUN TIME
161	22h



Photoluminescent
2013PL Shroud



2410 STEALTHLITE™

LIGHT SOURCE
LED

BATTERIES
4 AA Alkaline (included)

LENGTH
17.8 cm (7")

CERTIFICATIONS
CI II III, D1 IECEx ia



LUMENS	RUN TIME
183	5h 45m

2460 STEALTHLITE™



LIGHT SOURCE
LED

BATTERIES
4 NiMH (included)

LENGTH
17.8 cm (7")

CERTIFICATIONS
CI II, D2



LUMENS	RUN TIME
183	5h

3310PL PHOTOLUMINESCENT

LIGHT SOURCE
LED

BATTERIES
3 AA Alkaline (included)

LENGTH
15.6 cm (6.14")

MODES
High / Low / Flashing
(torch body glows in the dark)



(Photoluminescent)

UP TO	LUMENS	RUN TIME
	378	202h

3310ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE
LED

BATTERIES
3 AA Alkaline (included)

LENGTH
15.6 cm (6.14")

INCLUDES
3310PL and Wall Mountable Case
(torch body glows in the dark)



(Photoluminescent)

UP TO	LUMENS	RUN TIME
	378	202h

5000*

LIGHT SOURCE
LED

BATTERIES
2 AAA Alkaline

LENGTH
14.2 cm (5.59")

MODES
High / Low / Flashing



LUMENS	RUN TIME
202	7h



RECHARGEABLE



9050 LED LANTERN

LIGHT SOURCE
LED

BATTERIES
2 18650 Lithium-ion (included)

LENGTH
20,4 cm (8.03")

MODES
High / Low / Flashing
Flexible battery system



UP TO	LUMENS	RUN TIME
	3369	5h 30m

THE VERSATILE LANTERN WITH A DUAL LITHIUM-ION/ALKALINE BATTERY SYSTEM

Holds up to 4 lithium-ion rechargeable batteries or up to 16 AA alkaline or NiMH batteries.



* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.



ATEX LIGHTS

ZONE 0 & 1 (CAT. 1 & 2)

Peli's extense range of Zone 0 and Zone 1 torches complies with the highest standards of the European ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements. Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.

SEE ALL



DOWNLOAD OUR POSTER ON ATEX DIRECTIVE 2014/34/EU.




MAGNETIC CLIP



RECHARGEABLE

1930Z0 L1™



LIGHT SOURCE
LED

BATTERIES
4 LR 44 Alkaline (included)


LENGTH
6.7 cm (2.64")

CERTIFICATIONS
II 1 G Ex ia op is IIC T6/T4 Ga



SAFETY CERTIFIED	LUMENS	RUN TIME
	12	4h 15m

1975Z0 MITYLITE™



LIGHT SOURCE
LED

BATTERIES
2 AAA Alkaline (included)

LENGTH
14.6 cm (5.75")

CERTIFICATIONS
II 1 G Ex ia op is IIC T4 Ga



SAFETY CERTIFIED	LUMENS	RUN TIME
	117	2h 15m

1975Z1 MITYLITE™



LIGHT SOURCE
LED

BATTERIES
2 AAA Alkaline (included)

LENGTH
14.6 cm (5.75")

CERTIFICATIONS
II 2 G Ex ib op is IIB T4 Gb



SAFETY CERTIFIED	LUMENS	RUN TIME
	94	8h 15m

2220Z1 VB3™



LIGHT SOURCE
LED

BATTERIES
2 CR2032 Lithium (included)

LENGTH
8.9 cm (3.50")

CERTIFICATIONS
II 2 G Ex ib op is IIC T6 Gb



SAFETY CERTIFIED	LUMENS	RUN TIME
	8	8h

2010Z0 SABRELITE™



LIGHT SOURCE
LED

BATTERIES
3 C Alkaline (not included)

LENGTH
20.6 cm (8.11")

CERTIFICATIONS
II 1G Ex ia op is IIC T4/T3 Ga



SAFETY CERTIFIED	LUMENS	RUN TIME
	129	22h

Photoluminescent 2013PL Shroud



2315Z0



LIGHT SOURCE
LED

BATTERIES
2 AA Alkaline (included)

LENGTH
15.8 cm (6.22")

CERTIFICATIONS
II 1 G Ex ia op is IIC T4 Ga,
II 2 G Ex ib op is IIC T4 Gb



SAFETY CERTIFIED	LUMENS	RUN TIME
	115	6h

* For more information on ATEX, see page 6-7



2610Z0 HEADSUP LITE™



LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)


LENGTH
3.8 cm (1.49")

CERTIFICATIONS
II 1 G Ex ia op is IIC T4 Ga



SAFETY CERTIFIED	LUMENS	RUN TIME
	30	19h

2690Z0 HEADSUP LITE™



LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)


LENGTH
7.1 cm (2.81")

CERTIFICATIONS
I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga,
II 1D Ex ia IIIC T65°C Da



SAFETY CERTIFIED	LUMENS	RUN TIME
	74	11h

2745Z0 HEADSUP LITE™



LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)

LENGTH
5.7 cm (2.25")

CERTIFICATIONS
II 1 G Ex ia op is IIC T4 Ga

MODES
High / Low / Flashing



SAFETY CERTIFIED	LUMENS	RUN TIME
	33	40h

2410Z0 STEALTHLITE™



LIGHT SOURCE
LED

BATTERIES
4 AA Alkaline (included)

LENGTH
17.8 cm (7")

CERTIFICATIONS
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T135°C Da



SAFETY CERTIFIED	LUMENS	RUN TIME
	153	5h 45m

2460Z1 STEALTHLITE™



LIGHT SOURCE
LED

BATTERIES
4 AA NiMH (included)


LENGTH
17.8 cm (7")

CERTIFICATIONS
II 2 G Ex ib IIC T4 Gb



SAFETY CERTIFIED	LUMENS	RUN TIME
	181	5h

2755Z0 HEADSUP LITE™



LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)

LENGTH
5.7 cm (2.25")


CERTIFICATIONS
II 1 G Ex ia op is IIC T4 Ga

MODES
High / Low / Flashing



SAFETY CERTIFIED	LUMENS	RUN TIME
	115	16h

2765Z0 HEADSUP LITE™



LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)

LENGTH
5.7 cm (2.25")

CERTIFICATIONS
II 1 G Ex ia op is IIC T4 Ga


MODES
High / Low / Downcast / Flashing



SAFETY CERTIFIED	LUMENS	RUN TIME
	141	14h

* For more information on ATEX, see page 6-7

* For more information on ATEX, see page 6-7



3315Z0**LIGHT SOURCE**
LED**BATTERIES**
3 AA Alkaline (included)**LENGTH**
15.6 cm (6.14")**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da

SAFETY CERTIFIED	LUMENS	RUN TIME
	138	19h

3335RZ0**LIGHT SOURCE**
LED**BATTERIES**
1 Lithium-Ion 18650 (included)**LENGTH**
15.5 cm (6.11")**CERTIFICATIONS**
III 1 G Ex ia IIC T4 Ga

SAFETY CERTIFIED	LUMENS	RUN TIME
	246	58h

Right Angle
accessory available**3765Z0****LIGHT SOURCE**
LED**BATTERIES**
4 AA NiMH (included)**LENGTH**
13.6 cm (5.36")**CERTIFICATIONS**
II 1 G Ex ia op is IIC T3 Ga**MODES**
High / Low / Flashing


SAFETY CERTIFIED	LUMENS	RUN TIME
	194	20h

9415Z0 LED LANTERN**LIGHT SOURCE**
LED**BATTERIES**
4 C NiMH (included)**LENGTH**
22.2 cm (8.75")**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga**MODES**
High / Low / Flashing

SAFETY CERTIFIED	LUMENS	RUN TIME
	530	11h 30m

3415MZ0**LIGHT SOURCE**
LED**BATTERIES**
3 AA Alkaline**LENGTH**
18.9 cm (7.44")**CERTIFICATIONS**
II 1 G Ex ia op is IIC T4 Ga**MODES**
High / Flashing

SAFETY CERTIFIED	LUMENS	RUN TIME
	329	14h

3610Z0 LITTLE ED™**LIGHT SOURCE**
LED**BATTERIES**
4 AA Alkaline (included)**LENGTH**
19.1 cm (7.51")**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da

SAFETY CERTIFIED	LUMENS	RUN TIME
	153	5h 45m


3715Z0**LIGHT SOURCE**
LED**BATTERIES**
4 AA Alkaline**LENGTH**
13.6 cm (5.36")**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da**MODES**
High / Low / Downcast / Flashing

SAFETY CERTIFIED	LUMENS	RUN TIME
	189	31h

Photoluminescent
3713PL Shroud

* For more information on ATEX, see page 6-7

* For more information on ATEX, see page 6-7



TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.

SEE ALL



RECHARGEABLE

7000*

LIGHT SOURCE
LED

BATTERIES
2 CR123 Lithium-Ion (included)

LENGTH
13.5 cm (5.31")

MODES
High / Medium / Low / Strobe

UP TO	LUMENS	RUN TIME
	774	13h



7060



LIGHT SOURCE
LED

BATTERIES
1 Lithium-Ion 18650 (included)

LENGTH
22 cm (8.65")

MODES
High / Strobe / Medium / Low / Self Programmable

UP TO	LUMENS	RUN TIME
	402	57h



7600



LIGHT SOURCE
LED

BATTERIES
1 Lithium-Ion 18650 (included)*

LENGTH
15.7 cm (6.19")

MODES
High / Strobe / Medium / Low / Full Time Battery Level Indication

UP TO	LUMENS	RUN TIME
	944	29h



8060



LIGHT SOURCE
LED

BATTERIES
4 NiMH C (included)

LENGTH
32.2 cm (12.67")

MODES
High / Strobe / Medium / Low / Flashing / Self Programmable

UP TO	LUMENS	RUN TIME
	1072	60h



*Multi-battery.
Supports also 2 CR123

* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.



HEAD-LAMP LAMPS

With up to 558 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.

SEE ALL



GESTURE ACTIVATION CONTROL



RECHARGEABLE

2720 HEADLAMP



LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)

LENGTH
6.3 cm (2.48")

MODES
Variable Light Output /
Dual Red LED Night Vision

UP TO	LUMENS	RUN TIME
	200	103h



2740 HEADLAMP

LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)

LENGTH
5.7 cm (2.25")

MODES
High / Low / Flashing / Red LED

UP TO	LUMENS	RUN TIME
	66	21h



2750 HEADLAMP

LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)

LENGTH
5.7 cm (2.25")

MODES
High / Low / Flashing /
Red LED / Low Battery Warning

■ ■ (Photoluminescent)

UP TO	LUMENS	RUN TIME
	259	11h



2760 HEADLAMP

LIGHT SOURCE
LED

BATTERIES
3 AAA Alkaline (included)

LENGTH
5.7 cm (2.25")

MODES
High / Medium / Low /
Downcast / Flashing / Red LED /
Full-time Battery / Level Indicator

UP TO	LUMENS	RUN TIME
	289	11h



2780R HEADLAMP*



LIGHT SOURCE
LED

BATTERIES
1 Lithium-Ion 18650 (included)

LENGTH
7.6 cm (3.00")

MODES
High / Medium / Low /
Downcast / Spot / Flashing
Full-time Battery Level Indicator

■ 3 Interchangeable Covers Included

UP TO	LUMENS	RUN TIME
	558	7h 30m



Photo by HRC

* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.

INDUSTRIAL LIGHTS

LIGHTS SPECIFICATIONS

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS	CAT. NO.
1910	1 AAA Alkaline ^A	0.043 kg	9.7 cm	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■	1910
1920	2 AAA Alkaline ^A	0.062 kg	14 cm	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■	1920
1930	4 LR 44 Alkaline ^A	0.026 kg	6.7 cm	12	4h 15m	17	70	IPX4	CI, D1/CII, D2 IECEx ia	■ ■	1930
2010	3 C Alkaline	0.38 kg	20.6 cm	161	22h	160	6398	IPX7	CI II III, D1 IECEx ia	■	2010
2410	4 AA Alkaline ^A	0.207 kg	17.8 cm	183	5h 45m	161	6500	IPX7	CI II III, D1 IECEx ia	■	2410
2460	4 Ni-MH ^A	0.221 kg	17.8 cm	183	5h	179	8050	IPX7	CI II, D2	■	2460
3310PL	3 AA Alkaline ^A	0.176 kg	15.6 cm	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)	3310PL
3310ELS	3 AA Alkaline ^A	0.176 kg	15.6 cm	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8 (1m)	N/A	■ (photoluminescent)	3310ELS
5000	2 AAA Alkaline ^A	0.068 kg	14.2 cm	202*, 21**	1h 15m*, 7h**	69*, 21**	1176*, 111**	IPX8 (1m)	N/A	■ ^B	5000
9050	2 18650 Lithium-Ion ^A	1.301 kg	20.4 cm	3369 (Spot/Flood), 1119 (Flood), 2623 (Spot)	2h 45m (Spot/Flood), 5h 30m (Flood), 4h 15m (Spot)	417 (Spot/Flood), 47 (Flood), 489 (Spot)	43568 (Spot/Flood), 559 (Flood), 59760 (Spot)	IP67	TBC	■	9050

*High | **Medium | ***Low | ****Boost | ^A Batteries Included | ^B This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information. Additional approvals may apply. For details go to www.peli.com

ATEX TORCHES

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	APPROVALS	COLOURS	CAT. NO.
1930Z0	4 LR 44 Alkaline ^A	0.026 kg	6.7 cm	12	4h 15m	17	70	IPX4	II 1 G Ex ia op is IIC T6/T4 Ga	■	1930Z0
1975Z0	2 AAA Alkaline ^A	0.054 kg	14.6 cm	117	2h 15m	24	141	IP68	II 1 G Ex ia op is IIC T4 Ga	■	1975Z0
1975Z1	2 AAA Alkaline ^A	0.054 kg	14.6 cm	94	8h 15m	22	122	IP68	II 2 G Ex ib op is IIB T4 Gb	■	1975Z1
2010Z0	3 C Alkaline	0.38 kg	20.6 cm	129	22h	135	4582	IPX7	II 1G Ex ia op is IIC T4/T3 Ga	■	2010Z0
2220Z1	2 CR2032 Lithium ^A	0.028 kg	8.9 cm	8	8h	12	38	IPX4	II 2 G Ex ib op is IIC T6 Gb	■ ■	2220Z1
2315Z0	2 AA Alkaline ^A	0.13 kg	15.8 cm	115	6h	75	1403	IPX8	II 1 G Ex ia op is IIC T4 Ga, II 2 G Ex ib op is IIC T4 Gb	■	2315Z0
2410Z0	4 AA Alkaline ^A	0.207 kg	17.8 cm	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIC T135°C Da	■	2410Z0
2460Z1	4 AA Ni-MH ^A	0.221 kg	17.8 cm	181	5h	181	8235	IPX7	II 2 G Ex ib IIC T4 Gb	■	2460Z1
2610Z0	3 AAA Alkaline ^A	0.91 kg	3.8 cm	30*, 14****	19h*, 47h****	28*, 19****	194*, 91****	IPX4	II 1 G Ex ia op is IIC T4 Ga	■	2610Z0
2690Z0	3 AAA Alkaline ^A	0.116 kg	7.1 cm	74	11h	92	2124	IPX7	I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1D Ex ia IIC T65°C Da	■	2690Z0
2745Z0	3 AAA Alkaline ^A	0.94 kg	5.7 cm	33*, 17****	20h*, 40h****	35*, 25****	309*, 155****	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■	2745Z0
2755Z0	3 AAA Alkaline ^A	0.096 kg	5.7 cm	115*, 58****	8h*, 16h****	61*, 43****	925*, 455****	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■	2755Z0
2765Z0	3 AAA Alkaline ^A	0.096 kg	5.7 cm	141*, 27****	5h30m*, 14h****	78*, 9****	1512*, 22****	IP54	II 1 G Ex ia op is IIC T4 Ga	■ ■	2765Z0
3315Z0	3 AA Alkaline ^A	0.176 kg	15.6 cm	138	19h	146	5350	IP67	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIC T130°C Da	■	3315Z0
3335RZ0	1 Lithium-Ion 18650	0.130 kg	15.5 cm	246*, 30****	6h 15m*, 58h****	151*, 51****	5718*, 649****	IP67	III 1 G Ex ia IIC T4 Ga	■	3335RZ0
3415MZ0	3 AA Alkaline	0.272 kg	18.9 cm	329 (Spot/Flood), 174 (Flood), 185 (Spot)	6h (Spot/Flood), 15h (Flood), 14h (Spot)	133 (Spot/Flood), 38 (Flood), 134 (Spot)	4425 (Spot/Flood), 354 (Flood), 4517 (Spot)	IPX8 (1m)	II 1 G Ex ia op is IIC T4 Ga	■	3415MZ0
3610Z0	4 AA Alkaline	0.298 kg	19.1 cm	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIC T135°C Da	■	3610Z0
3715Z0	4 AA Alkaline	0.408 kg	13.6 cm	189*, 90****, 23****	4h*, 7h****, 31h****	249*, 157****, 24****	15552*, 6150****, 150****	IPX4	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIC T130c Da	■	3715Z0
3765Z0	4 AA NiMH ^A	0.414 kg	13.6 cm	194*, 92****, 24****	3h 30m*, 6h 45m****, 20h****	256*, 161****, 24****	16392*, 6454****, 146****	IPX4	II 1 G Ex ia op is IIC T3 Ga	■	3765Z0
9415Z0	4 C NiMH ^A	1.65 kg	22.2 cm	530*, 202****	4h 30m*, 11h 30m****	272*, 166****	18480*, 6914****	IPX4	II 1 G Ex ia IIC T4 Ga	■	9415Z0

*High | **Medium | ***Low | ****Downcast | ^ Batteries Included
Additional approvals may apply. For details go to www.peli.com

TACTICAL LIGHTS

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS	CAT. NO.
7000	2 CR123 Lithium ^A	0.159 kg	13.5 cm	774*, 457**, 99***	1h 15m*, 1h 45m**, 13h***	246*, 176**, 83***	14768*, 7712**, 1738***	IPX7	N/A	■ ^B	7000
7060	1 Lithium-Ion 18650 ^A	0.295 kg	22 cm	402*, 162**, 18***	3h 30m*, 12h**, 57h***	210m*, 131m**, 45m***	11078*, 4312**, 500***	IPX4	N/A	■	7060
7600	1 Lithium-Ion 18650 ^A	0.196 kg	15.7 cm	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8 (1m)	N/A	■	7600
8060	4 C NiMH ^A	0.658 kg	32.2 cm	1072*, 551**, 29***	3h 45m*, 4h 15m**, 60h***	376*, 265**, 60***	35300*, 17520**, 889***	IPX6	N/A	■	8060

HEADLAMPS

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS	CAT. NO.
2720	3 AAA Alkaline ^A	0.108 kg	6.3 cm	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■	2720
2740	3 AAA Alkaline ^A	0.094 kg	5.7 cm	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■	2740
2750	3 AAA Alkaline ^A	0.096 kg	5.7 cm	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ (photoluminescent)	2750
2760	3 AAA Alkaline ^A	0.096 kg	5.7 cm	289*, 156**, 97***, 42****	1h 30m*, 3h 15m**, 5h 30m***, 11h****	101*, 66**, 48***, 19****	2540*, 1097**, 567***, 88****	IPX4	N/A	■	2760
2780R	1 Lithium-Ion 18650 ^A	0.207 kg	7.6 cm	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ ^B	2780R

*High | **Medium | ***Low | ****Downcast | ^A Batteries Included | ^B This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information. Additional approvals may apply. For details go to www.peli.com

LIGHT MOUNTING SYSTEMS AND HOLSTERS

ACCESSORIES



HOLSTER STYLES

CAT. NO. 7607	
CAT. NO.	
7600	•

LIGHT AND HEADLAMP HOLDER STYLES

	CAT. NO. 0770C, UNIV.	CAT. NO. 0782 ALL IN*	CAT. NO. 2748Z0	CAT. NO. 1975HZ0
CAT. NO.				
1975Z0				•
2390	•			
2410	•			
2460	•			
2745Z0			•	
2755Z0			•	
2765Z0			•	
3310	•	•		
3315	•	•		

* This item is available upon minimum order quantities. Check with your Customer Service representative for further details.

CUSTOM LABELS

MORE THAN A FLASHLIGHT



LIMITED LIFETIME* GUARANTEE

* Lifetime guarantee not applicable where prohibited by law.

Peli offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Peli lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colours.

We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and moulding programs.



SELF PROGRAMMABLE
(On selected models only)



PIVOTING 60° HEAD
(On selected models only)



GESTURE ACTIVATION
(On selected models only)



GRAPHIC DESIGN STUDIO
Our in-house graphics studio will take your logo and size it appropriately to the torch of your choice.



HOT STAMPING
Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply.



LASER ETCHING
Available only on metal bodied lights.



USB RECHARGEABLE
(On selected models only)



DOWNCAST LIGHTING FEATURES
(On selected models only)



PHOTOLUMINESCENT DESIGNS
(On selected models only)

374
14.72

A

D



C

A

PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 7
08025 Barcelona • Spain
Tel +34 934 674 999

PELI PRODUCTS FRANCE S.A.S.
20/22 Rue des Petits Hôtels
75010 Paris • France
Tel +33 (0)1 44 83 95 63

PELI PRODUCTS GERMANY GmbH
Neudorfer Strasse 285 C
09474 Crottendorf • Germany
Tel +49 (0)37344 313999

381.5
15.00